


readID™ Wall S SE 1360

Outdoor Reader for
MIFARE® DESFire® with PINPad

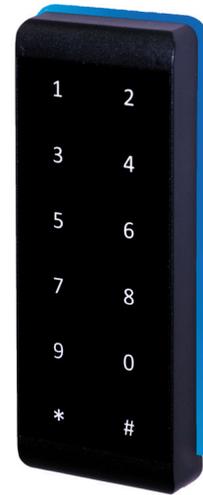

Functional description

The readID™ Wall S is the slim model in the series of wall mounted card reader for both in- and outdoor use. The card reader is a 13,56 MHz ISO14443A based solution for reading of MIFARE® Classic, MIFARE® Ultralight and MIFARE® DESFire® family of cards and tags.

The capacitive touch PIN pad with white backlight and the full RGB color status LED has automatic ambient light compensation.

Connection to the access control panel is available via Wiegand, Clock/Data, OSDP and Custom RS485 interface depending on the actual firmware and configuration.

In-field configuration is available via a USB interface that allows for both firmware update and changing of configuration.

The tamper detection function monitors the opening of the card reader with a mechanical switch. The mounting plated for readID™ Wall S is designed to fit on 50 mm facade profiles and narrow wall spaces.

Product versions:

- SE 1360 DKC readID™ Wall E, MIFARE DESFire, PIN pad and Cable
- SE 1360 DC readID™ Wall E, MIFARE DESFire and Cable

CARD TECHNOLOGY	DATA TYPES	DATA	DATA FORMAT
NXP MIFARE® Classic	Sector data or UID/CSN	32, 56 & 128 Bit	26,32,56 Bit Hex/Dec/ASCII/Rev
NXP MIFARE® Ultralight®	UID/CSN	32 & 56 Bit	26,32,56 Bit Hex/Dec/Rev
NXP MIFARE® DESFire®	App/File data or UID/CSN	56 & 8-256 Bit	26,32,56 Bit Hex/Dec/Rev
ISO 14443A	UID/CSN	32 & 56 Bit	26,32,56 Bit Hex/Dec/Rev

The custom format allows for verification of valid data received on bit length and selecting part of the card number by use of offset and data length. Output data can be formatted as decimal or hexadecimal and can be truncated.

How to order

When ordering a card reader please specify: product number & configuration in the following manor:

Version	SE 1360 DKC	readID™ Wall E, MIFARE DESFire, PIN pad & Terminal
Configuration	SE 1360 SFN	Format ID: xx , I/O = High / Low, PIN = 4bit, 8bit, 1 char, 2 char, OSDP

Selecting data format and interface type

The firmware in the readID™ Wall S reader allows for multiple output formats in order to interface seamlessly with the access controller.

The Clock/Data interface outputs the card number and PIN data using the ABA / Track 2 protocol.

The Wiegand interface outputs the card number and PIN data using common Wiegand formats including both 4 and 8 bits (Dorado) outputs for PIN pad data.

The RS485 interface is bi-directional half-duplex for use with OSDP compatible access controllers or can be supplied with support for custom protocols.

MIFARE Classic or MIFARE DESFire reading and / or writing can be configured using the seucu.exe configuration tool or via the OSDP protocol.

On site configuration requires seucu software, which is freely downloadable from

www.securityengineering.com

The current format list is available on the website.

Audio & visual indication

The readID Wall S card reader is equipped with a buzzer for acoustic indication and a full RGB color LED for visual indication.

Standard firmware allows for external control of Red, Green, Yellow, Blue LED and the Buzzer.

Firmware

The card reader can be firmware updated in field using the seufu.exe utility, which is freely downloadable from www.securityengineering.com

Standard firmware supports OSDP, Wiegand or Clock/Data Interface.

Data

Dimensions	121 x 50 x 16 mm (L x W x H)	
Color	Black (RAL 9005)	
Connection	10 way Fix mount screened cable (3m)	
Supply Voltage	5 – 30 VDC / 50 mA	
Temperatur Range	-30° C -> +70° C	
IP Rating	IP54 or IP65 with seal between reader and wall	
Commodity code	8471.60.9030	
Country of Origin	DK	
ECCN code (US)	N	
Export list number (EU)	N	
Certification	CE & UKCA	
EAN	SE 1360 DKC	5745000789047
	SE 1360 DC	5745000789053